



18" Cut Hydro Sod Cutter
*Featuring Set and Forget[™]
blade depth adjustment*

**ALL NEW
HYDRO
DRIVE!**



**Effortless Operation
and Maximum
Productivity for Any
Job, Any Operator**

- Best in class Set and Forget[™] blade depth adjustment saves time and provides precise cutting depths to 2.5 inches
- Variable speed hydrostatic drive transmission allows operators to match cutting speed to ground condition
- Fastest transport speed of any unit on the market – over 3.5 mph.
- Adjustable reverse speed allows maneuvering out of tight areas
- Standard rear swivel caster is perfect for curved work and locks for straight cutting
- Oversized handle isolation mounts absorb vibration
- Unique drive wheels clear mud and improve grip
- 5.5 Honda power with a 3-year warranty



Features and Specifications



HYDRO-DRIVE TRANSMISSION

Variable speed hydrostatic drive transmission allows user to tailor cutting speed to ground condition, maintaining sod quality and maximizing productivity. Offers fastest transport speed on the market at over 3.5 mph. Adjustable reverse speed allows seamless maneuvering out of tight areas quickly, without damaging sod.



SET AND FORGET™ BLADE DEPTH ADJUSTMENT TO 2.5"

Single lever and clamp at user's operating position adjusts simply, saving time and providing precise cutting depths for all tasks including sod relocation, flower bed or planting area creation, concrete flat work and other hardscape projects.



FINGER-TIP ACCESS DRIVE CONTROLS

Comfortably under-mounted for finger-tip access versus paddle or roll throttle styles.



REAR SWIVEL CASTER Perfect for curved work and locks for straight cutting plus reverse.



MULTIPLE OVERSIZED ISOLATION MOUNTS Mounts are designed to absorb vibration so operator completes tasks quickly, comfortably and without fatigue.




18" CUTTING BLADE Cuts sod cleanly and evenly and up to 2.5" depth. Optional 12" blade kit (Part No. 371600)



UNIQUE DRIVE WHEELS

Tough cutting conditions are easily executed as paddle style wheels clear mud and improve grip for added control.

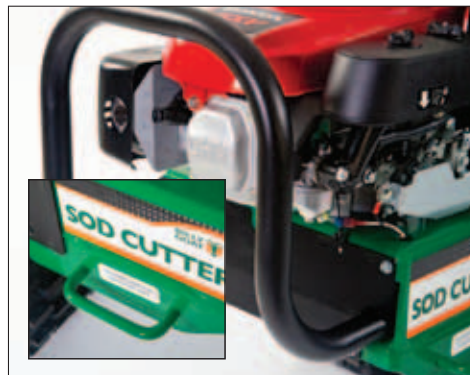

FRONT BUMPER BAR & TIE DOWN POINTS

Machine transport is safe and easy with a heavy-duty front bumper bar and convenient tie-downs which provide stabilized strapping when moving to and from project locations.

POWERED by HONDA

Model	Engine	Weight	Cutting Width	Cutting Depth	Length	Width	Height	Transmission
SC180H	163 cc Honda GXV160	348 lb (157.8 kg)	18" (45.7 cm)	Maximum of 2.5" (6.35 cm)	59" (149.9 cm)	26.5" (66 cm)	36.5" (90.8 cm)	Hydro Gear RT310